

CL1000

Slideaway™ LCD Console

The CL1000 is a KVM console module that serves as the front-end for standard KVM switches. The CL1000 features an integrated 17" LCD panel, full keyboard, and touchpad in a 1U, rack-mountable, Slideaway™ housing. Users who already have a switch can take advantage of the space saving and efficiency benefits of the CL1000 LCD KVM console without the unnecessary expense of having to purchase a KVM Switch .




OS Support Win, Linux, FreeBSD	Computers SPHD PS/2	LCD Monitor 17"	NEW OS Support Vista
-----------------------------------	------------------------	--------------------	-------------------------

Rack Mount Kit	Depth (cm)
2X-010G (Long/Optional)	68 - 100
Short (Standard)	42 - 72

Easy Installation Rack Mount Kit	Depth (cm)
2X-012G (Long/Optional)	68 - 105
2X-011G (Short/Optional)	42 - 70

Setup

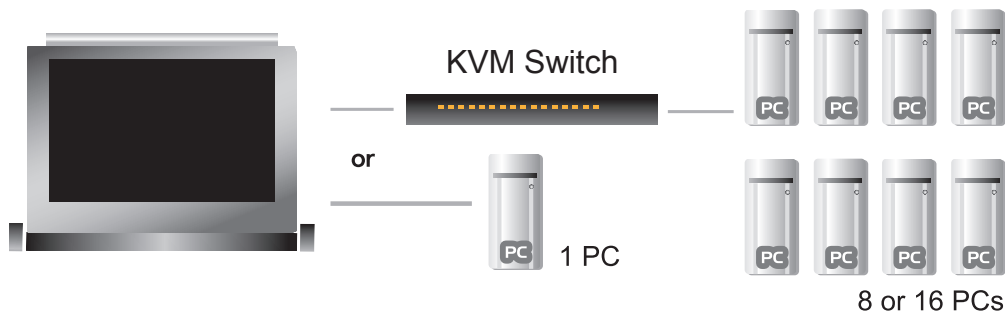

Features

- Integrated KVM console with 17" LCD monitor - in a Slideaway™ housing
- Slideaway™ housing is less than 1U - with top and bottom clearance for smooth operation in a 1U high system rack
- Internal power built in
- Adjustable depth to fit within the rack
- High video resolution:
 - Up to 1280 x 1024 @75Hz (17" LCD)
 - Supports DDC, DDC2, DDC2B
- DDC emulation of the LCD monitor - VGA settings of every connected computer are automatically adjusted for optimal output to the LCD monitor
- Language support: American English; UK English; German; French; Spanish; Traditional Chinese; Japanese; Korean
- Improved design-Single person installation (Optional)

Specifications

Function		CL1000
Connectors	KVM Ports Keyboard/ Video/Mouse	1 x SPHD-15 Female (Yellow)
	Power	1 x 3-prong AC Socket
Switches	LCM Adjustment	4 x Pushbuttons
	KM Reset	1 x Semi-Recessed Pushbutton
	Power	1 x Rocker
LEDs	Power	1 (Blue)
	Num Lock	1 (Green)
	Caps Lock	1 (Green)
	Scroll Lock	1 (Green)
Emulation	Keyboard / Mouse	PS/2
Video	17" LCD	1280 x 1024; DDC2B
I/P Rating		100 - 240 VAC; 50/60 Hz; 1A
Power Consumption	17" LCD	120V,27W / 230V,35W
Environment	Operating Temp.	0-40° C
	Storage Temp.	-20-60° C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	17" LCD 13.70 kg
	Dimensions (D x W x H)	52.00 x 48.00 x 4.20 cm(19"/1U)

* The specifications and pictures are subject to change without notice.