

Model: **CL-1208 / CL-1216**  
8/16 Port PS/2 Slideaway LCD KVM Switch



The Master View CL-1208 / CL-1216 are advanced 8 / 16 port KVM switches that integrate a 15" or 17" LCD monitor, keyboard and mouse in a Slideaway console that can be comfortably mounted in less than 1U of rack space. By daisy chaining compatible Master View max switches, as many as 512 computers can be controlled from a single CL-1216 console using hotkey combinations or the On Screen Display (OSD) menu.

A second console may be added easily via the rear ports, enabling two users to simultaneously and independently manage any computer on the KVM installation.

To simplify rack mounting, we offer the Easy Installation Rack Mounting Kit. This optional kit streamlines the rack mounting process, making one-person installation easy and convenient.

### Features

- Integrated KVM console featuring a 15" or 17" LCD monitor in Slideaway housing
- Dual consoles- simultaneous viewing and control or select one or the other via OSD
- 105-key keyboard
- Daisy chain up to 31 additional ACS-1208A or ACS-1216A units and control up to 512 computers
- Internal power built in
- Less than 1 U high mountable rack
- Port selection via Push button, Hotkey and OSD
- Two level password security - only authorized user view and control the computers - up to four users plus an administrator with separate profiles for each
- DDC emulation of the LCD monitor - VGA settings of every connected computer are automatically adjusted for optimal output to the LCD monitor
- Improved design Easy Rack Mounting-Single person installation (Optional)

### Specifications


Function		CL-1208	CL-1216
Computer	Direct	8	16
Connections	Max	256 (Via Daisy Chain)	512 (Via Daisy Chain)
Computer Port Selection		Push Button, Hotkey, OSD	
Connectors	Second Console	Keyboard Video Mouse	1 x Mini Din 6 Female (Purple) 1 x HDB15 Female (Blue) 1 x Mini Din 6 Female (Green)
	Computer	K/B/Video/ Mouse	8 x SPHD-15 Female 16 x SPHD-15 Female
	Chain Port		1 x 25 Pin D-Type Male (Black)
	Firmware upgrade		1 x RJ-11 Female
	Power		3 Prong AC Socket
	Switches	Firmware Upgrade	
LCM Adjustment			4 x Buttons
KM Reset			1 x Semi-Recessed Push Button
Power			1 x Rocker Switch
LEDs	On Line	8 (Orange)	16 (Orange)
	Selected	8 (Green)	16 (Green)
	Power	1 (Blue)	
	Num Lock	1 (Green)	
	Caps Lock	1 (Green)	
Emulation	Keyboard	PS/2	
	Mouse	PS/2	
Video	15" LCD	1024 x 768; DDC2B	
	17" LCD	1280 x 1024; DDC2B	
Scan Interval		1-255 Seconds	
Power Consumption	15" LCD	120V, 21W 230V, 30W	120V, 21W 230V, 30W
	17" LCD	120V, 30W 230V, 37W	120V, 30W 230V, 37W
Environment	Operating Temperature	0°~50° C	
	Storage Temperature	-20°~60° C	
	Humidity	0~80% RH, NC	
Physical Properties	Housing	Metal	
	Weight	15" LCD 14.1 kg	14.3 kg
	Dimensions (D x W x H)	17" LCD 14.6 kg	14.8 kg
		62.6 x 48 x 4.4 cm	62.6 x 48 x 4.4 cm

15" or 17"



CL-1216 Rear View

### Diagram

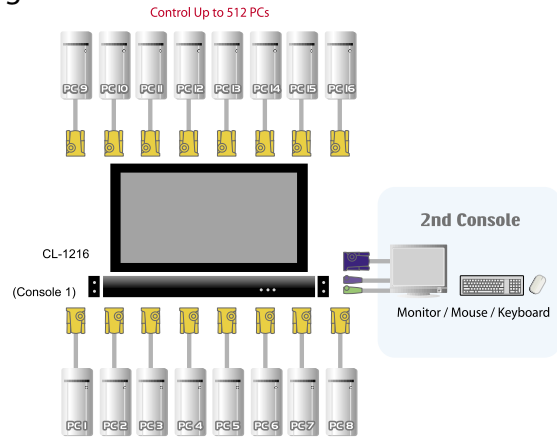

### Accessories



- 1.8m PS/2 KVM cable x 2 (pic.1)
- 1.8m Firmware Upgrade Cable x 1 (pic. 2)
- Rack Mounting Kit x 1 (pic. 3)
- Power Cord x 1 (pic. 4)

### Optional Equipment

- **Cables & Converters for USB interface support:**
  - 1. PC compatible:** a 1.8m (2L-5202UP), 3m (2L-5203UP) and 6m(2L-5206UP) USB KVM cable is needed, please refer to page P65-N
  - 2. Windows/Mac compatible:** UC-100 KMA (PS/2 to USB adapter), please refer to page P35
  - 3. Sun (USB) :** CV-131A, see page P34, **SUN (Legacy):** CV-130A, see page P33
- **Daisy chain cable**  
0.6m (2L-1700), 1.8m (2L-1701), please refer page P65-J
- **PS/2 KVM cable**  
We offer varying lengths: 1.2m (2L-5202P), 1.8m (2L-5202P/2L-5702P), 3m (2L-5203P) and 6m (2L-5206P) please refer to page P64-B
- **Optional rack mounting kit**  
Easy-Installation Rack Mounting Kit - Short  
Easy-Installation Rack Mounting Kit - Long

