



# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

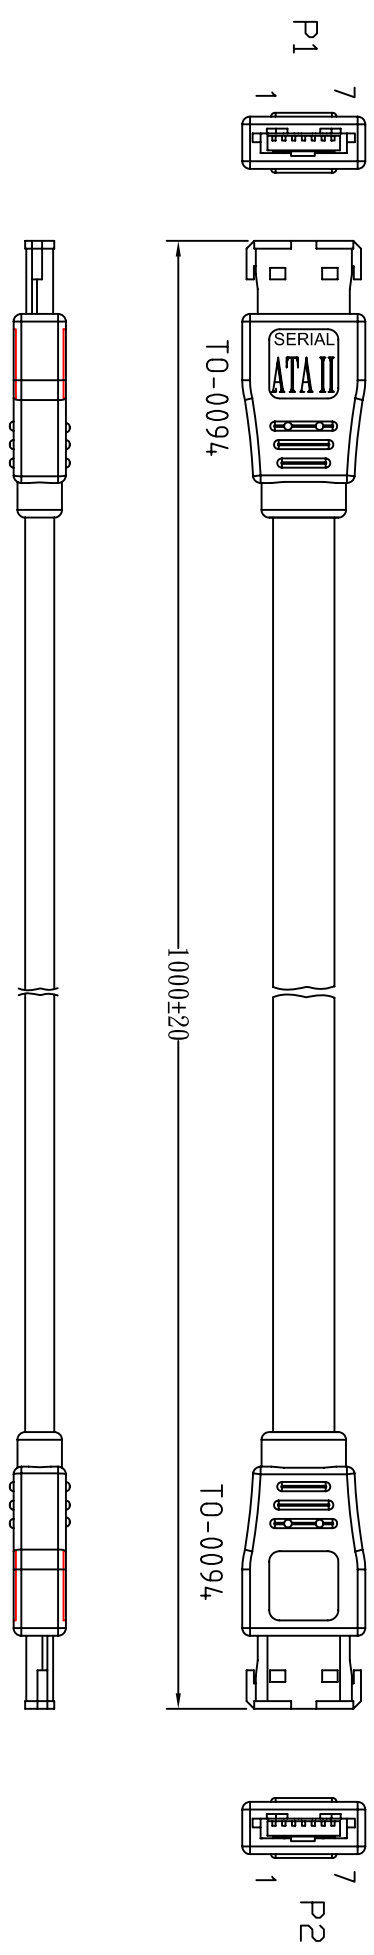

### PIN ASSIGNMENT

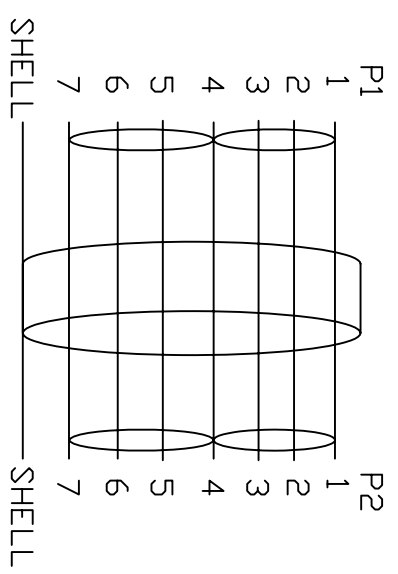


#### NOTE:

1. CABLE: UL2725 [26AWG(1/0.404)\*2F INS: HD-PE ID:1.3\*2.7+DRAIN WIRE 28AWG(1/0.32)\*2C+AL/MY]\*2C INNER JACKET: PVC OD: 7.3\*2.1mm +AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK(NK-K01), OD: 9.0\*4.0mm, IMPEDANCE: 100 OHM.
2. CONNECTOR:
  - P1&P2: SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL
  - 3. SHIELD: COPPER-FOIL
  - 4. HOOD: MOILED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
  - 5. TEST REQUEST:
    - 100% OPEN SHORT MIS WIRE TEST
    - CONTACT RESISTANCE 3 ohm MAX
    - INSULATION RESISTANCE 10M ohm MIN.
6. PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL  
 <2>EACH CARTON / ROHS LABEL(L\*W=35\*22mm)  
 <3>EAN CODE: 4260113564127

Tolerance Inch W/M		Title	
X	.015	<b>2DIRECT GMBH</b> SERIAL ATA II SINGAL EXTERNAL CABLE	
.XX	.010		
.XXX	.005		
.05	.05		
Draw PANNIE 02/26/07		Customer P/N: CS0004	
Check		App'd	Customer: E-DIR
Engr		Scale NONE	Units m/m
Dwg No. 140-1464		REV: A	Third Angle Projection
		Sheet 1/2	

LTR	REV.	DESCRIPTION	DATE

POLYBAG

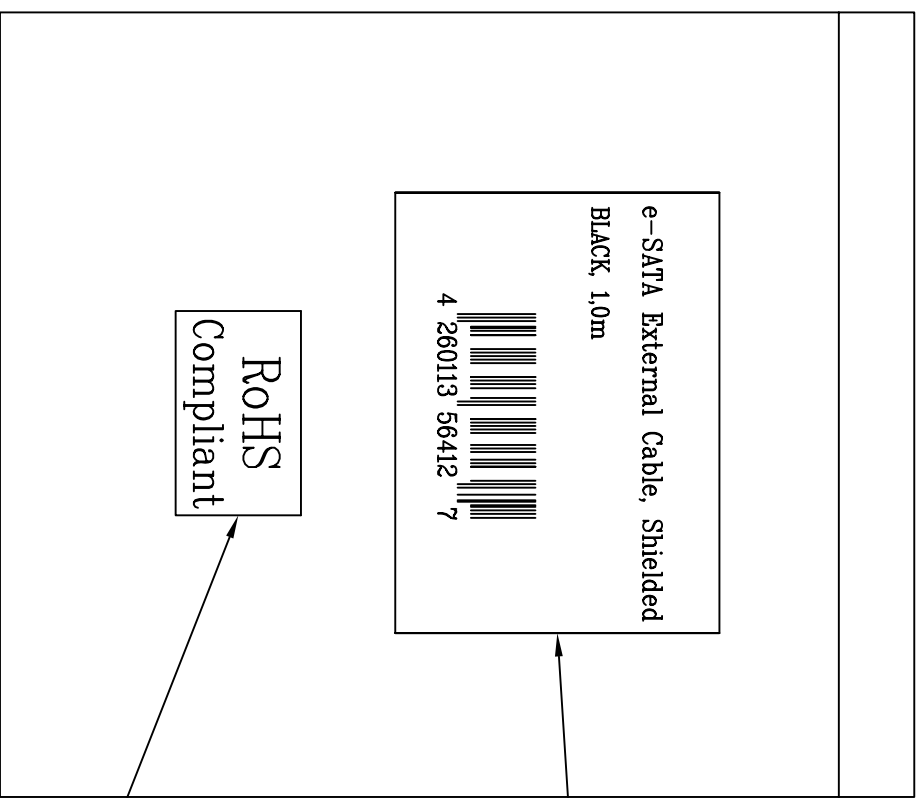

50mm

40mm



LABEL  
 (#=CABLE LENGTH)

WHITE BASE BLACK WORDS  
 (L\*W= 35\*22mm)

LABEL POSITION

Tolerance	Inch	M/M	2DIREKT GMBH			
X	.015	.30	Title SERIAL ATA II SINGAL EXTERNAL CABLE Customer P/N: CS0004 App'd _____ Customer: E-DIR Scale NONE Units m/m Third Angle Projection Dwg No. 140-1464 REV: A Sheet 2/2			
.XX	.010	.10				
.XXX	.005	.05				
Draw	FANNIE 02/26/07		Customer P/N: CS0004			
Check			App'd _____ Customer: E-DIR			
Engr			Scale NONE Units m/m Third Angle Projection			
			Dwg No. 140-1464 REV: A Sheet 2/2			