

Model: **FH-300**
3 Port FireWire HUB



Model: **FH-600**
6 Port FireWire HUB



The FH-300 and FH-600 IEEE 1394 Hubs provide three (FH-300) or six (FH-600) 1394a compliant ports that support data transfer rates of 100, 200, and 400 Mbps (Megabits per second). Each port automatically switches to the highest speed that the peripheral supports. Each IEEE 1394 peripheral connects externally; simply plug in the cables. Configuration is automatic; there is no need to specify memory addresses, IRQ assignments, device IDs, or even plug in terminators. The advantages of hot pluggable connectivity and non interrupting daisy chaining has distinguished FireWire as a household standard.


Features

- IEEE 1394, IEEE 1394a Compliant
- 100, 200, 400 Mbps Data Transfer Rate; Automatically Uses the Highest Speed the Peripheral Supports
- Supports Hot Plugging
- 3/ 6 IEEE 1394 Ports for More Convenient Adding and Removing of Devices
- 6 pin IEEE 1394 I/O Connectors
- DC Input Terminal for Optional External Power Supply

Specifications

Function	FH-300	FH-600
Power Consumption	DC9V, 0.15W	DC9V, 0.15W
Ports	3	6
Connectors	Upstream Power	3 x 6 Pin IEEE 1394 Std. 1 x DC Jack
LEDs	1	1 x DC Jack
Data Transfer Rate	100,, 200, 400 Mbps (Asynchronous, Isochronous)	
Cable	Type Length	6 Pin - 6 Pin IEEE 1394 1.8 m (6')
Standards Support	IEEE 1394a	
Environment	Operation Temperature Storage Temperature Humidity	0°~50° C -20°~60° C 0~80% RH, NC
Physical Properties	Housing Weight Dimensions (L x W x H)	Plastic 55 g 7.76 x 7.02 x 3.12 cm
		0.11 kg 9.22 x 9.14 x 3.33 cm

Diagram

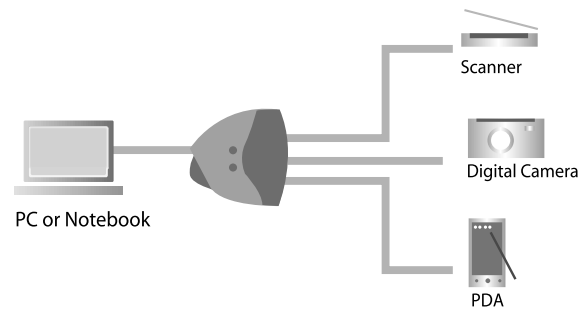

Accessories



IEEE 1394 Cable x 1 (pic.1)
Power Adapter: DC9V x 1 (FH-600) (pic.2)

