

VS0404



+ Download :



New

● 4-Port Video Matrix Switch

→ The VS0404 Video Matrix Switch allows video and audio from 4 computers to be routed to 4 monitors, projectors and speakers. Ideal for presentations and applications where information from multiple computers is being delivered to multiple destinations.

Patent NO. : CN ZL 02301212.9


| Features

- Each of the 4 video outs can toggle between Source 1 and Source 4 Using front panel pushbuttons
- Audio enabled
- Duplicate and enhance video signals to up to 65 meters (max.)
- Expandable: Cascade to ATEN's video splitters to support hundreds of video displays
- With up to 300 MHz Video Bandwidth

| Package Content

- 1x Video Matrix Switch
- 1x VGA/Audio Cable (1.8m)
- 1x Power Adapter
- 1x Quick Start Guide
- 1x User Manual

| Diagram

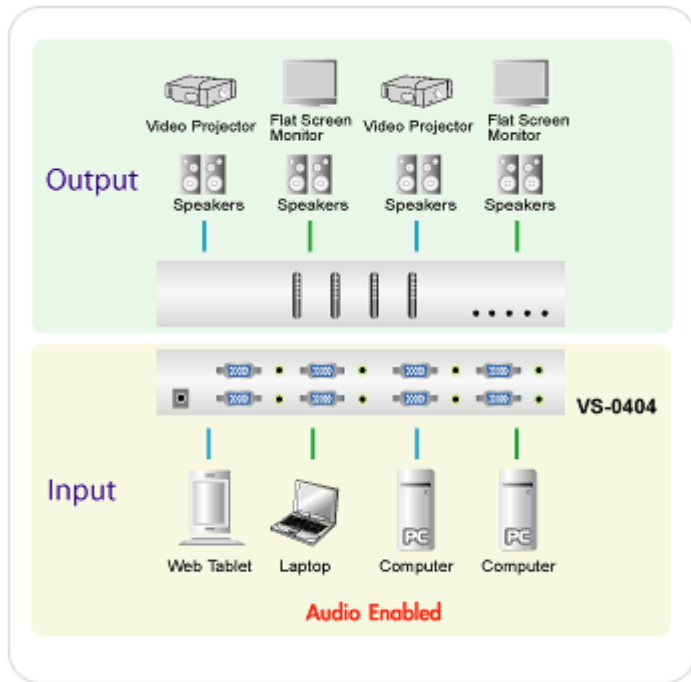

+ [View enlargement](#)

Specification



Input Connections		4	
Output Connections		4	
Computer Port Selection		Pushbutton	
Connectors	Input	Video	4 x HDB-15 Male (Blue)
		Audio	4 x Mini Stereo Jack Female (Green)
	Output	Video	4 x HDB-15 Female (Blue)
		Audio	4 x Mini Stereo Jack Female (Green)
	Power	1 x DC Jack (Black)	
LEDs	Power	1 (Blue)	
	Activity / Source	4 (Green)	
	Input	1	4 (Green)
		2	4 (Green)
		3	4 (Green)
4		4 (Green)	
Buttons	Port Selection	4	
Video		1920 x 1440@60Hz	
Video Bandwidth		300 MHz	
Signal Type		VGA, SVGA, XGA, UXGA Multisync	
Sync Range		Sync Positive/Negative	
Cable Distance		65m (210')	
Power Consumption		DC 5.3V ,12W (Max.)	

Environment	Operating temperature	0-50 °C
	Storage temperature	-20-60 °C
	Humidity	0 -80% RH, NC
Physical Properties	Housing	Metal
	Weight	0.89kg
	Dimension (L x W x H)	26 x 7.5 x 4.5cm