

## Fibre Uniboot Patch Cord OS2, LC-LC

### Technical Features

Space-saving, high-performance patch solution

Jacket: LSZH, yellow, Ø3 mm, IEC60754-2 (Halogen free), IEC 61034 (Low smoke), IEC60332-1 (Flame retardant)

OS2 9/125µm


For G657.A2 Fiber

UPC Polish

Changeable uniboot

Used in high density integration system

### Technical Drawing

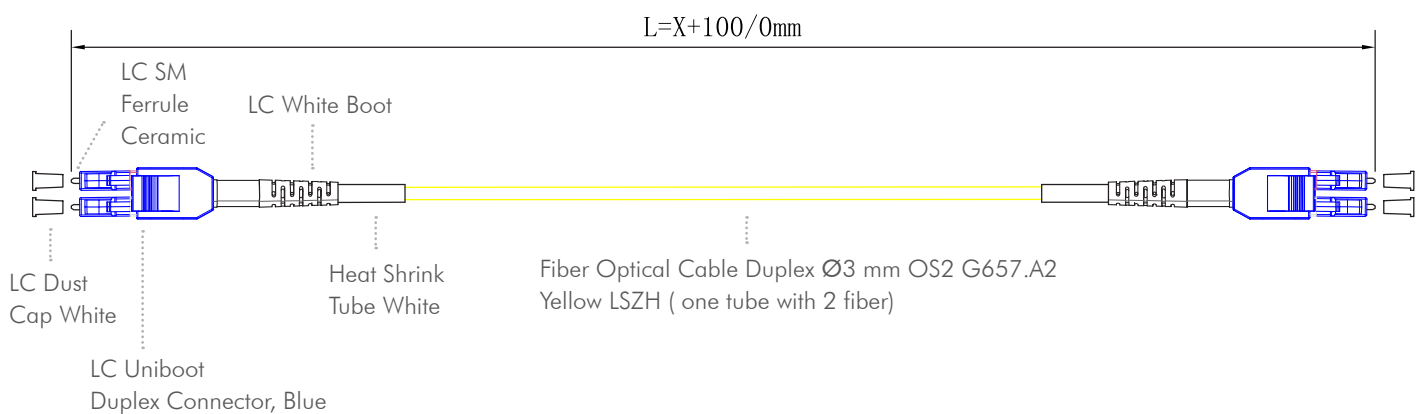

## Transmission Characteristics


Insertion Loss	97% $\leq$ 0,25 dB; Means $\leq$ 0,12 dB
Return Loss	UPC $\geq$ 50 dB; APC $\geq$ 60 dB
Minimum Quality Class	Grade B/2 according to IEC-61753-1
Fiber Quality	Class A

## LC Uniboot Connector Switch Polarity


① Get ready to switch.



② Open the connector bottom.

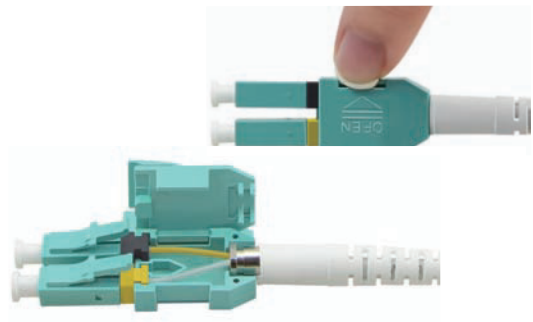

③ Switch the polarity.

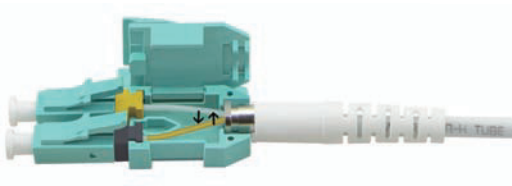

④ Close the connector.



Length	Art-No.	EAN Code
0,5 m	FPOUB00	4052792056907
1 m	FPOUB01	4052792056914
2 m	FPOUB02	4052792056921
3 m	FPOUB03	4052792056938
5 m	FPOUB05	4052792056945
7,5 m	FPOUB07	4052792056952
10 m	FPOUB10	4052792056969
15 m	FPOUB15	4052792056976
20 m	FPOUB20	4052792056983

## Package Content

1 x Fiber Uniboot Patch Cord OS2

## Packaging Information

Art no.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Packing Weight
FPOUB00	160 x 200 x 20 mm	0,0115 kg	450 x 250 x 250 mm	300 pcs	3,96 kg
FPOUB01	160 x 200 x 20 mm	0,0139 kg	450 x 250 x 250 mm	300 pcs	4,67 kg
FPOUB02	160 x 200 x 20 mm	0,0195 kg	450 x 250 x 250 mm	250 pcs	5,38 kg
FPOUB03	160 x 200 x 20 mm	0,0301 kg	450 x 250 x 250 mm	200 pcs	6,52 kg
FPOUB05	200 x 240 x 20 mm	0,0443 kg	450 x 250 x 250 mm	120 pcs	5,82 kg
FPOUB07	200 x 240 x 20 mm	0,0732 kg	450 x 250 x 250 mm	50 pcs	4,16 kg
FPOUB10	200 x 240 x 20 mm	0,0893 kg	450 x 250 x 250 mm	80 pcs	7,64 kg
FPOUB15	200 x 240 x 20 mm	0,127 kg	450 x 250 x 250 mm	50 pcs	6,85 kg
FPOUB20	200 x 240 x 20 mm	0,136 kg	450 x 250 x 250 mm	50 pcs	7,28 kg