

## Cat.6A Class EA Wall Outlet, Shielded, Vertical Cable Entry

### Technical Features

Complies with ISO/IEC 11801 & TIA/EIA-568-C


2 x shielded R45 jack, 40° angled

Vertical cable entry with strain relief

Flush-mount or cable duct installation

Supports PoE, PoE+ and PoE++

### Technical Drawing

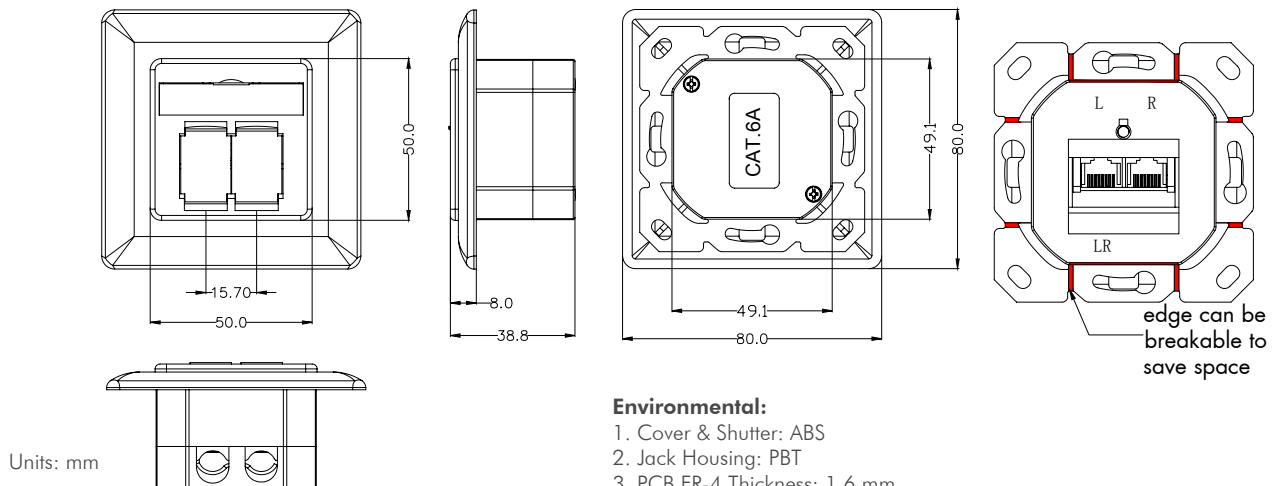

#### Electrical:

1. Voltage Rating: 125 V AC RMS
2. Current Rating: 1.5 A mp
3. Contact Resistance: 100 Milli OHMS Max
4. Insulation Resistance: 1000 M OHMS Min@500 V DC
5. Dielectric Strength: 750 V AC RMS 60Hz, 1 min
6. Cat.6A Permanent Link: Conform to ANSI/TIA/EIA-568 C.2

#### Environmental:

1. Storage: -40°–85°
2. Operation: 0°–70°

#### Environmental:

1. Cover & Shutter: ABS
2. Jack Housing: PBT
3. PCB FR-4 Thickness: 1.6 mm
4. Contact Material: Phosphor Bronze T=0.35 mm 8P8C Gold Plated
5. IDC Contact: Phosphor Bronze T=0.50 mm with Nickel Plating
6. Mounting Bracket: ZINC Alloy#3
7. Top Cover: ZINC Alloy#3
8. RJ45 Jack Life: 750 times min.
9. IDN Life: 200 times min.
10. Wire: AWG 22–24 cable, 0.65mm–0.5mm
11. IDC Body: Krone Type PC/ABS with colour coded printing T568A/B



Art no.	Color	Suitable Surface Back Box	EAN Code
NP0127	Signal White RAL 9003	NP0223	4052792028607
NP0128	Pure White RAL 9010	NP0221	4052792028591

## Package Content

1x Cat.6A Wall Outlet

## Packaging Information

Packing Dimension	85x85x60 mm
Packing Weight	0.18 kg
Carton Dimension	360x360x260 mm
Carton Q'ty	64 pcs
Carton Weight	11.2 kg

