

LogiLink®

4K HDMI™ Switch, 3x1 Ports 4K/60 Hz, Remote Control


Art. No.: HD0044

Designed for applications that require the routing of 3 sources to 1 compatible display device. It enables the reliable transmission at video resolutions up to 4K@60 Hz. Features auto and manual switching modes for selection; instantly switching for a smooth video transition between HDMI ports.


Features:

- » Allows up to three HDMI sources to be connected to one HDMI display
- » Supports manual switching, remote switching or automatic switching (Smart function)
- » Resolution up to UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
- » Bandwidth up to 18 Gbps (6 Gbps at 600 MHz per channel)
- » Supports HDCP 2.2
- » Supports DDC, HDR and CEC
- » Supports 36 bit Deep Color (12 bit per channel)
- » Supports LPCM 7.1, Dolby TrueHD and DTS-HD Master Audio™

| Power WITCH Output Input | Power LED indicator HDMI input switch button IR signal receiver HDMI output LED indicator HDMI input 1-3 ports LED indicator |
|--|--|
| (f) (g) (b) | (f) HDMI input 1-3 ports (g) HDMI output port (h) DC 5 V input (i) Select previous HDMI input source |
| | (j) Select next HDMI input source (j) Select HDMI input 1, 2 or 3 (l) Smart function – press "MEMORY" for HD0044 to remember the active input source, and select this input source port automatically when restarts. |



*The specifications and pictures are subject to change without prior notice. *All trade names referenced are the registered trademarks of their respective owners.

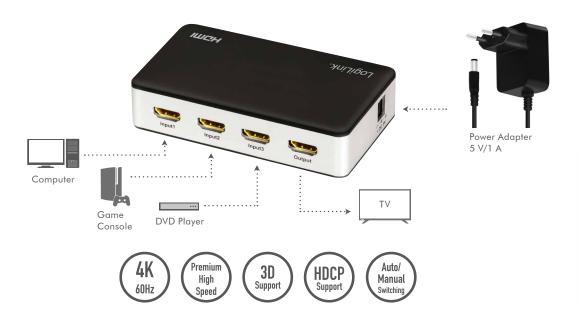



Specifications:

| Input Ports | 3x HDMI-A female, 1x DC jack |
|-----------------------------|---|
| Output Port | 1x HDMI-A female |
| HDMI Version | 2.0 |
| HDCP Version | 2.2 |
| HDMI CEC | Yes |
| HDMI HDR | HDR10, HLG, Dolby Vision, G-SYNC HDR from Nvidia |
| Output Resolution | 480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz |
| Video Bandwith | Up to 18 Gbps |
| 3D Supporting | Yes |
| Input and Output DDC Signal | Yes |
| Chassis Material | ABS and aluminum |
| LED Indicator | Yes |
| IR Remote Support | Yes |
| Power Consumption | 5 W max. |
| Power Supply | 5 V/1 A |
| Uncompressed Audio | LPCM 7.1 |
| Compressed Audio | DTS-HD Master Audio™, Dolby TrueHD |
| Operating Temperature | 0–70°C |
| Operating Humidity | 10–85% RH (no condensation) |
| Dimensions | 11.8 x 6.5 x 2.6 cm |
| Weight | 110 g |





Specification of External Power Supply:

| Input Voltage | 100–240 V, 50/60 Hz 0.2 A max. |
|---------------|--------------------------------|
| Output Power | 5 V/1 A, 5 W |
| DC Plug | 5.5 x 2.1 mm |
| Dimensions | 51 x 35 x 59 mm |
| Cable Length | 1.2 m |
| Weight | 70 g |



Package Contents:

- » 1x 4K HDMI Switch
- » 1x Remote control
- » 1x Power Adapter
- » 1x User Manual

Package Information:

- » Packing Dimension: 190 x 145 x 60 mm
- » Packing Weight: 0.34 kg
- » Carton Dimension: 505 x 235 x 340 mm
- » Carton Q'ty: 15 pcs
- » Carton Weight: 5.6 kg





