LogiLink®

manufactured by

CANOVATE®

Canovate 19"
Outdoor cabinet

Part no.: D24F66G

This outdoor cabinet is an ideal small size solution for any 19" active equipment installation and a perfect fiber cross connect cabinet for FTTX applications.
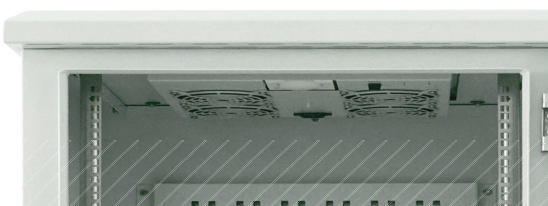
Technical Features

Material:	Single layer galvanized steel - 2 mm
Protection Level	IP65
Plinth:	250 mm (H) plinth is included in standard configuration
Finish:	Epoxy polyester outdoor paint, RAL 7035

Highlights

- Weather-proof outdoor cabinet for installation of 19" active equipments and optical distribution modules
- Assembly of modular optical building blocks like splice, patch and splitter modules
- Provides a secure anchor for incoming loose tube cables within the cabinet
- Easy installation and removal
- Doors are protected from external access through hidden hinges
- High resistivity against corrosion
- 1 pair of 19 inch mounting rails
- Single front door
- With roof fan unit for better air circulation
- CNC controlled polyurethane (PUR) gasketing is available for all of the complete openable surfaces of the outdoor to provide IP65 protection degree, which is complying with the EN6O529 standard
- 1,5 mm mounting plate for cable management on the back side
- C-rail for fixing cables on the back side

Ventilation Unit Top cover designed for air circulation

RoHS compliant CE