





### **Technical Features**

Mobile Spool for easy installation & transportation

S/FTP PiMF, 4x 2x AWG26/1, bare copper

LSZH jacket O.D. 6.0mm

With Cat.6A keystone jack and 86x86 mm face plate


ISO/IEC 11801:2002, ISO/IEC EN 50173, EIA/TIA 568-C Cat.6A, IEC 60603-7-51


Supports PoE per IEEE 802.3af, PoE+ per IEEE 802.3at


Indoor use, operating temperature: -10 -  $60^{\circ}$ C

Cable color: Orange

## **Technical Drawings**

















\*The specifications and pictures are subject to change without prior notice.
\*All trade names referenced are the registered trademarks of their respective owners.



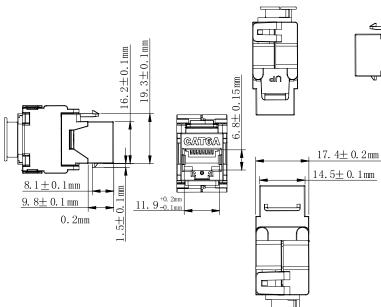







#### Notes:

- 1. Contact Resistance: 20M OHMS max.
- 2. Insulation Resistance: 500M OHMS min. @500V DC
- 3. Withstand Voltage: DC 1000V AC 700V RMS 60Hz, 1min

#### **Environmental:**

- 1. Storage: -40°-70°
- 2. Operation: -10°-60°

#### Mechanical:

- 1. Shield Material: Zinc Alloy
- 2. IDC Material: PC UL94V0 Tepminal: Phosphor Bronze, Tin Plating
- 3. RJ45 Contact Life: 750 times min.
- 4. IDN Life: 250 times min.
- 5. RJ45 Dimension: 11.9x9.8mm
- 6. Weight: 34.7g

## **Package Contents**

1x Cat.6A S/FTP Cable Spool 60m

# **Packaging Informations**

Packing Dimension	390x280x490 mm
Packing Weight	4.45 kg
Carton Dimension	390x280x490 mm
Carton Q'ty	1 pcs
Carton Weight	4.45 kg





















\*The specifications and pictures are subject to change without prior notice.

\*All trade names referenced are the registered trademarks of their respective owners.