

LogiLink®

HDMI™ Switch, 4x1 Ports Multiviewer


1080p/60 Hz, Remote Control

Art. No.: HD0052

Supports four HDMI input sources to be displayed on one screen with three multi-view modes and seamlessly switch the four HDMI inputs. It also can be controlled through the front panel button or IR control.

Features:

- » Allows seamless switching between four HDMI signal sources on one screen (with same resolution)
- » Resolution up to Full HD 1080p@60 Hz
- » Bandwidth up to 7.5 Gbps (2.5 Gbps at 250 MHz per channel)
- » Supports scaler up and scaler down function
- » Compliant with HDCP 1.3
- » Supports 36 bit Deep Color (12 bit per channel)
- » Supports DDC and Multiviewer (up to 4 pictures on one screen) function
- » Supports manual control and IR remote control
- » Supports LPCM 7.1, Dolby Digital and DTS
- » Supports USB upgrade

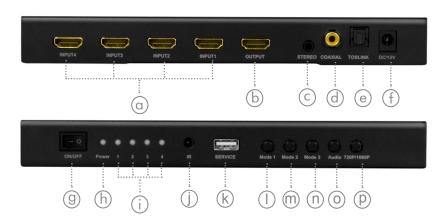

- Mode 2: Fullscreen mode seamless switch button
- (n) Mode 3: One bigger and three smaller windows mode switch button
- (0) Audio channel output select button
- (p) HDMI output resolution 720p/1080p switch button

- (a) HDMI input 1-4 ports
- (b) HDMI output port
- C Stereo audio output
- (d) Coaxial audio output
- (e) Toslink audio output
- (f) DC 12 V input
- (g) Power ON/OFF button
- (h) Power LED indicator
- (i) Input 1–4 LED indicator
- (j) IR Receiver
- (k) Service Port: For firmware update
- Mode 1: "+" type , "H" type, "I" type modes switch button









- (9) Power Button: Power standby/power ON
- (r) Audio output mute ON/OFF
- S Full Screen Mode: Press 1–4 button will select the corresponding channel and displayed in full screen as a seamless switcher
- (†) Audio Switch: press 1–4 button will select the corresponding audio output (In Mode 1 and 3)
- (U) Mode 1: The four HDMI input sources are displayed in 2x2 on one screen. In this mode, press the button will select the "H" type or "+" type

Mode 3: The four HDMI input sources are displayed with one bigger and three smaller windows on one screen. In this mode, press the button 1–4 will select the corresponding channel to the bigger window

720p/1080p button: press the button to switch between 720p and 1080p

V Cycle Interval: In the full screen mode: press 1s, 3s, 5s, 7s button will select the corresponding time to the Picture looping









Specifications:

Input Ports	4x HDMI-A female, 1x DC power jack
Output Port	1x HDMI-A female, 1x Stereo, 1x Coaxial, 1x Toslink
HDMI Version	1.3
HDCP Version	1.3 (only for input)
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz
Video Bandwith	Up to 7.5 Gbps
3D Supporting	Yes
Input and Output DDC Signal	Yes
Chassis Material	Metal
LED Indicator	Yes
IR Remote Support	Yes
Power Consumption	8 W max.
Power Supply	12 V/2 A
Uncompressed Audio	LPCM 2.0/5.1/7.1 CH 44.1/48 KHz
Compressed Audio	DTS, Dobly Digtal
Operating Temperature	0-70°C
Operating Humidity	10-85% RH (no condensation)
Dimensions	21.3 x 10 x 2.5 cm
Weight	463 g







Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.65 A max.
Output Power	12 V/2 A, 24 W
DC Plug	5.5 x 2.1 mm
Dimensions	68 x 43 x 68 mm
Cable Length	1.2 m
Weight	120 g



Package Contents:

- » 1x HDMI Switch
- » 1x Remote Control
- » 1x Power Adapter
- » 1x User Manual

Package Information:

» Packing Dimension: 243 x 196 x 60 mm» Packing Weight: 0.83 kg

» Carton Dimension: 505 x 235 x 340 mm

» Carton Q'ty: 10 pcs» Carton Weight: 8.9 kg





