



Fibre Uniboot Patch Cord OM4, LC-LC

Technical Features

Halogenfree outer jacket

Jacket: LSZH, erika violet, Ø3 mm, IEC60754-2(Halogen free), IEC 61034(Low smoke), IEC60332-1(Flame retardant)

OM4 50/125µm


For 10 Gbit Ethernet

UPC Polish

Changeable uniboot

Used in high density integration system

Technical Drawing

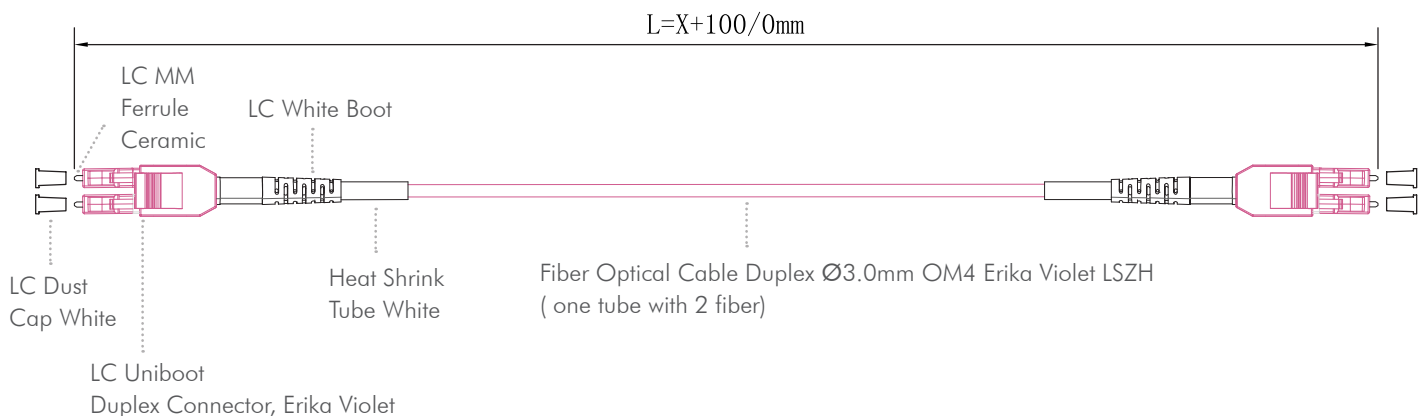

Transmission Characteristics


Insertion Loss	$97\% \leq 0,25 \text{ dB}$; Means $\leq 0,12 \text{ dB}$
Return Loss	$\geq 30 \text{ dB}$
Minimum Quality Class	Grade A/1 according to IEC-61753-222-2
Fiber Quality	Class A

LC Uniboot Connector Switch Polarity


① Get ready to switch.



② Open the connector bottom.

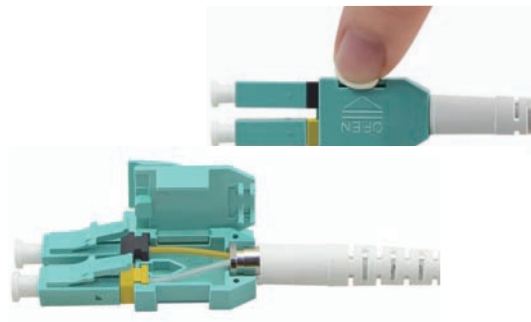

③ Switch the polarity.

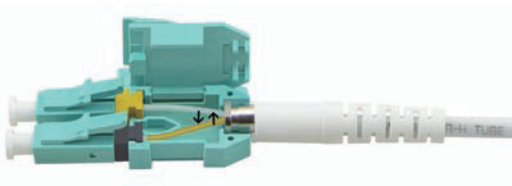

④ Close the connector.



Length	Art-No.	EAN Code
0,5 m	FP4UB00	4052792056815
1 m	FP4UB01	4052792056822
2 m	FP4UB02	4052792056839
3 m	FP4UB03	4052792056846
5 m	FP4UB05	4052792056853
7,5 m	FP4UB07	4052792056860
10 m	FP4UB10	4052792056877
15 m	FP4UB15	4052792056884
20 m	FP4UB20	4052792056891

Package Content

1 x Fiber Uniboot Patch Cord OM4

Packaging Information

Art no.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Packing Weight
FP4UB00	160 x 200 x 20 mm	0,0115 kg	450 x 250 x 250 mm	300 pcs	3,96 kg
FP4UB01	160 x 200 x 20 mm	0,0139 kg	450 x 250 x 250 mm	300 pcs	4,67 kg
FP4UB02	160 x 200 x 20 mm	0,0195 kg	450 x 250 x 250 mm	250 pcs	5,38 kg
FP4UB03	160 x 200 x 20 mm	0,0301 kg	450 x 250 x 250 mm	200 pcs	6,52 kg
FP4UB05	200 x 240 x 20 mm	0,0443 kg	450 x 250 x 250 mm	120 pcs	5,82 kg
FP4UB07	200 x 240 x 20 mm	0,0732 kg	450 x 250 x 250 mm	50 pcs	4,16 kg
FP4UB10	200 x 240 x 20 mm	0,0893 kg	450 x 250 x 250 mm	80 pcs	7,64 kg
FP4UB15	200 x 240 x 20 mm	0,127 kg	450 x 250 x 250 mm	50 pcs	6,85 kg
FP4UB20	200 x 240 x 20 mm	0,136 kg	450 x 250 x 250 mm	50 pcs	7,28 kg