



FTTH Termination Box 2 x LCD/APC with Installation Cable

Technical Features

Fiber to the home termination box, fully assembled Box 80 x 80 mm with 2x LCD/APC adapter With 4-core breakout cable Prefabricated on one side with pigtail 4x LC/APC Flame retardant and halogen-free, B2ca-s1a, d0, a1 Compliant with EN 50575:2014+A1:2016

Art No.	Length	EAN Code
FB4LC20	20 m	4052792071665
FB4LC30	30 m	4052792071672
FB4LC40	40 m	4052792071689
FB4LC50	50 m	4052792071696
FB4LC60	60 m	4052792071702

Technical Drawings





Colored Coating Fiber:250um±15um

 Inner Jacket
 Test:

 Polyester yarn
 TYPE
 Single-Mode

 Insertion Loss
 ≤0.3dB (IEC 61300-3-4)


 Return Loss
 APC≥60dB (IEC 61300-3-6)


 Outer Jacket: White 2.2mm±0.2mm
 Test Wavelength
 1310nm


www.2direct.de


*The specifications and pictures are subject to change without prior notice. *All trade names referenced are the registered trademarks of their respective owners.












28+2

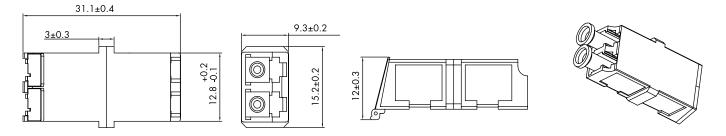

Package Content

1x FTTH Termination Box

Packaging Information

Art no.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Packing Weight
FB4LC20	250 x 235 x 50 mm	0.336 kg	480 x 265 x 260 mm	10 pcs	3.86 kg
FB4LC30	250 x 235 x 50 mm	0.386 kg	480 x 265 x 260 mm	10 pcs	4.36 kg
FB4LC40	250 x 235 x 50 mm	0.432 kg	480 x 265 x 260 mm	10 pcs	4.82 kg
FB4LC50	250 x 235 x 50 mm	0.528 kg	480 x 265 x 260 mm	10 pcs	5.78 kg
FB4LC60	250 x 235 x 50 mm	0.48 kg	480 x 265 x 260 mm	10 pcs	5.3 kg



*The specifications and pictures are subject to change without prior notice. *All trade names referenced are the registered trademarks of their respective owners.