



## Fiber Trunk Cable U-DQ(ZN)BH CPR Dca

### Technical Features

LC/UPC to LC/UPC

4 cores OM4

Multimode 50/125μ


LSZH, black, Ø6 mm

LC MM simplex connector with clip, Erika violet


Flame retardant and halogen-free, Dca-s2, d0, a1

Compliant with EN 50575:2014+A1:2016

### Technical Drawings

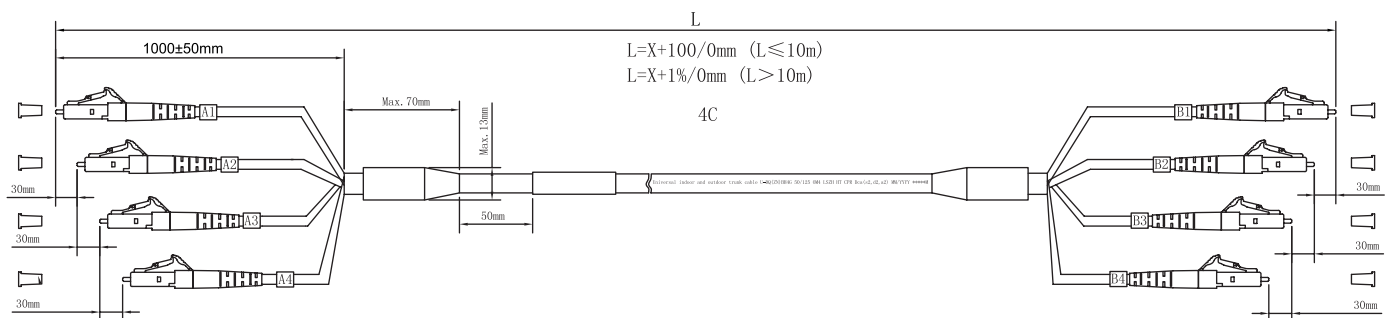

Pull ring with braided net on both ends:

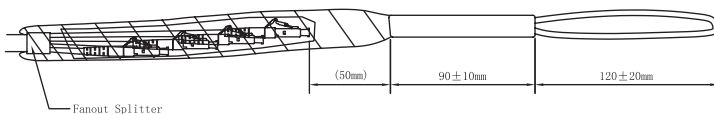

Test Grade Designation: Each to		Reference
Grade IL/RL	Standard	
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss(RL)	≥30dB	IEC 61300-3-6
Test Wavelength	850nm	Multi-mode
End face inspection	×400	

Length	LC/UPC-LC/UPC	EAN Code	Length	LC/UPC-LC/UPC	EAN Code
10 m	FT1U010	4052792066982	80 m	FT1U080	4052792067064
15 m	FT1U015	4052792066999	100 m	FT1U100	4052792067071
20 m	FT1U020	4052792067002	120 m	FT1U120	4052792067088
30 m	FT1U030	4052792067019	140 m	FT1U140	4052792067095
40 m	FT1U040	4052792067026	160 m	FT1U160	4052792067101
50 m	FT1U050	4052792067033	180 m	FT1U180	4052792067118
60 m	FT1U060	4052792067040	200 m	FT1U200	4052792067125
70 m	FT1U070	4052792067057			

## Package Content

1 x Fiber Trunk Cable



## Packaging Information

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
FT1U010	305 x 305 x 35 mm	0,48 kg	335 x 335 x 220 mm	10 pcs	5 kg
FT1U015	305 x 305 x 35 mm	0,58 kg	335 x 335 x 220 mm	10 pcs	6 kg
FT1U020	305 x 305 x 40 mm	0,76 kg	335 x 335 x 220 mm	5 pcs	4 kg
FT1U030	305 x 305 x 45 mm	1,15 kg	335 x 335 x 220 mm	5 pcs	6,75 kg
FT1U040	305 x 305 x 60 mm	1,65 kg	335 x 335 x 220 mm	4 pcs	7 kg
FT1U050	305 x 305 x 85 mm	2,2 kg	335 x 335 x 220 mm	2 pcs	4 kg
FT1U060	305 x 305 x 85 mm	2,55 kg	335 x 335 x 220 mm	2 pcs	5,8 kg
FT1U070	305 x 305 x 85 mm	2,8 kg	335 x 335 x 220 mm	2 pcs	6 kg
FT1U080	305 x 305 x 85 mm	3,45 kg	335 x 335 x 220 mm	2 pcs	7,5 kg
FT1U100	320 x 320 x 200 mm	5,68 kg	335 x 335 x 220 mm	1 pcs	6,18 kg
FT1U120	320 x 320 x 200 mm	6,3 kg	335 x 335 x 220 mm	1 pcs	6,88 kg
FT1U140	320 x 320 x 200 mm	7,05 kg	335 x 335 x 220 mm	1 pcs	7,56 kg
FT1U160	400 x 400 x 200 mm	8,35 kg	415 x 415 x 220 mm	1 pcs	9,18 kg
FT1U180	400 x 400 x 200 mm	9,4 kg	415 x 415 x 220 mm	1 pcs	10,18 kg
FT1U200	400 x 400 x 200 mm	10,2 kg	415 x 415 x 220 mm	1 pcs	10,8 kg