

# **LogiLink**<sub>®</sub>


HDMI to VGA and Audio Cable, 2 m

Art. No.: CV0052A

This HDMI to VGA/Audio Cable converts digital HDMI signal into analog VGA video signal and R/L audio signal. It allows users to enjoy their high definition image and sound when watching movies or playing games on the traditional VGA monitors or projectors. It offers solutions for digital entertainment center, HDTV retail and show site, data center control, conference room presentation, school and corporate training environments.

#### Features:

- » Converts digital HDMI signals to analog VGA
- » Comply with HDMI Standard
- » Resolution up to Full HD 1080p
- » Power supply via USB interface

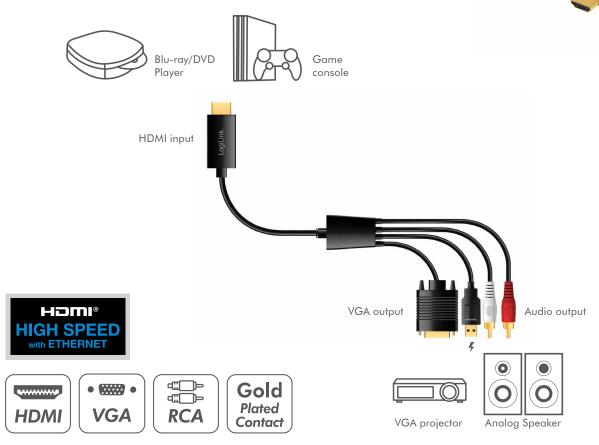







# **Specification:**

Input Video Signal	0.5–1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Max. Power Consumption	0.75 W
Input	HDMI A female (19 pin)
Outputs	VGA HD15 male + USB-A male + 2x RCA male
HDMI Video Input Format	480i/576i/480p/576p/720p/1080i/1080p
VGA Video Output Format	480i/576i/480p/576p/720p/1080i/1080p
Vertical Frequency Range	50/60 Hz
Input Video Amplifier Bandwidth	1.65 Gbps/165 MHz
Operating Temperature	0–70°C
Operating Humidity	10–85% RH (no condensation)
External Power Supply	USB powered
Cable Length	2 m
Weight	130 g

## **Package Contents:**

- » 1 x HDMI to VGA and Audio Cable
- » 1 x User Manual

### **Package Information:**

» Packing Dimension: 173 x 260 x 60 mm

» Packing Weight: 0.21 kg

» Carton Dimension: 320 x 366 x 285 mm

» Carton Q'ty: 10 pcs» Carton Weight: 3 kg





