



Cat.6A Patch Cable with Solid Wires (24 AWG)

Technical Features

For 10 Gigabit Ethernet

Supports HDBaseT 4K@30 Hz

Supports up to 100 W PoE

Standard: Exceeds ANSI/TIA-568.2-D Category 6A and ISO 11801 Class EA Channel

PoE Compatibility: PoE/PoE+/PoE++

Conductor: Solid copper 4x2x24/1 AWG


Patch cord type: U/UTP, solid wires

Jacket: Flame retardant (IEC60332-1-2)

Connector: 2x RJ45 male, unshielded, gold plated (50 μ)

Cable color: Blue/Boot color: Black

Technical Drawing

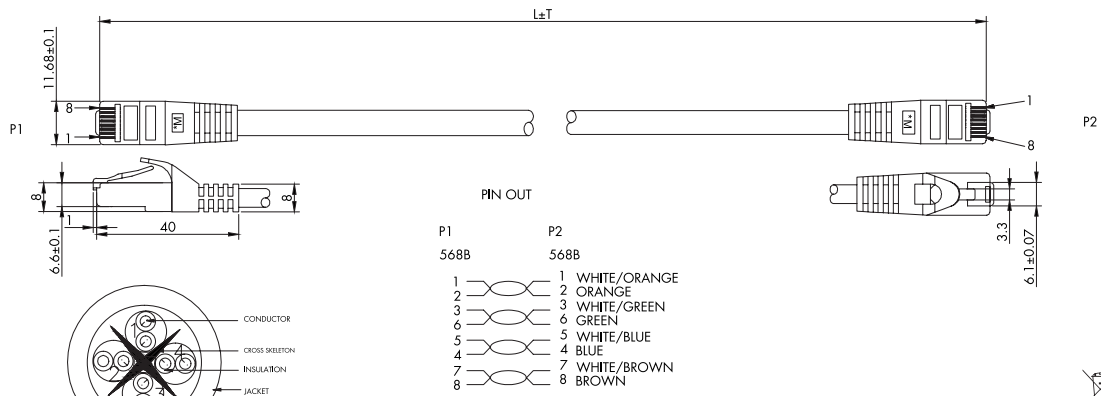

Unit: mm

Made in China

www.2direct.de



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Length	Blue	EAN Code
1.00 m	CPP001	4052792065862
2.00 m	CPP002	4052792065879
3.00 m	CPP003	4052792065886
5.00 m	CPP005	4052792065893
7.50 m	CPP007	4052792065909
10.00 m	CPP010	4052792065916
15.00 m	CPP015	4052792065923
20.00 m	CPP020	4052792065930
25.00 m	CPP025	4052792065947
30.00 m	CPP030	4052792065954
40.00 m	CPP040	4052792065961
50.00 m	CPP050	4052792065978

Package Content

1x CAT6A U/UTP Patch Cable

Packaging Information

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
CPP001	160x190x15 mm	0,041 kg	400x300x200 mm	100 pcs	5,1 kg
CPP002	160x190x20 mm	0,075 kg	400x300x300 mm	100 pcs	8,5 kg
CPP003	200x230x25 mm	0,103 kg	400x300x350 mm	100 pcs	11,3 kg
CPP005	200x230x30 mm	0,16 kg	400x300x300 mm	50 pcs	9 kg
CPP007	200x230x30 mm	0,27 kg	400x300x350 mm	50 pcs	14,5 kg
CPP010	200x230x30 mm	0,312 kg	400x300x250 mm	25 pcs	8,8 kg
CPP015	230x260x40 mm	0,44 kg	400x300x350 mm	25 pcs	12 kg
CPP020	230x260x55 mm	0,584 kg	400x300x400 mm	25 pcs	15,6 kg
CPP025	230x260x65 mm	0,725 kg	400x300x400 mm	20 pcs	15,5 kg
CPP030	250x380x65 mm	0,867 kg	400x300x350 mm	15 pcs	14 kg
CPP040	300x340x55 mm	1,26 kg	400x300x200 mm	5 pcs	7,3 kg
CPP050	300x340x65 mm	1,52 kg	400x300x250 mm	5 pcs	8,6 kg