

LogiLink®



4K HDMI™ Splitter, 1x4 Ports


4K/60 Hz, EDID, Downscaler

Art. No.: HD0038

This 4K HDMI Splitter with EDID management is an advanced solution for splitting a single HDMI input to four HDMI outputs. It provides high performance audio and video output up to UHD 4K@60 Hz resolution and delivers up to 18 Gbps of bandwidth, ensuring the best 4K picture quality.

Features:


- » Connects one HDMI source to four HDMI displays at the same time
- » Resolution up to UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
- » Bandwidth up to 18 Gbps (6 Gbps at 600 MHz per channel)
- » Supports HDCP 2.2 (internal HDCP Key) and EDID Management
- » Supports DDC, HDR, CEC and downscaler function
- » Supports 36 bit Deep Color (12 bit per channel)
- » Supports LPCM 7.1, Dolby TrueHD and DTS-HD Master Audio™
- » Perfect solution for home, school, bars and restaurants

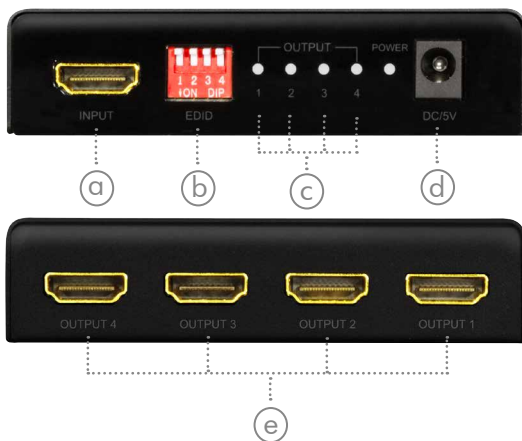

- (a) HDMI input port
- (b) EDID mode select DIP-switch
- (c) HDMI output 1-4 LED indicator
- (d) DC 5 V input
- (e) HDMI output 1-4 port



The „Downscale“ function allows the product to display the 4K input resolution on two screens/monitors with different maximum resolutions (e.g. 1080p and 4K) simultaneously. This is useful, for example, when using an older Full HD (1080p) monitor and a newer Ultra HD (4K) monitor at the same time.

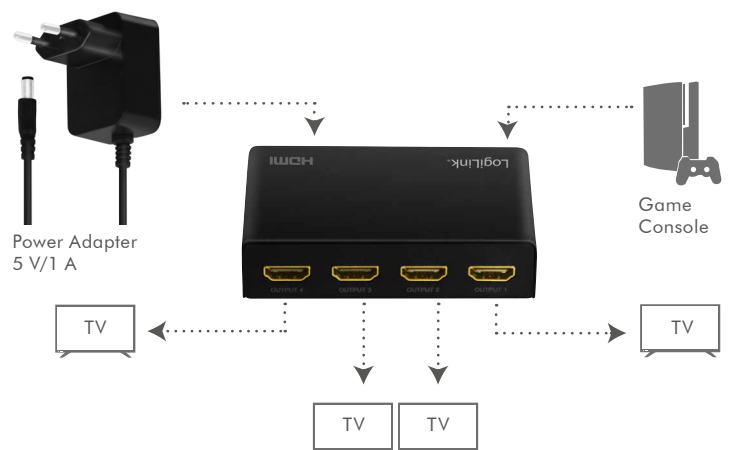

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

EDID Control Mode:

Mode	Binary Code	1 2 3 4	DIP Switch	EDID Information
Mode 1	111 1	↑ ↑ ↑ ↑		4Kx2K/60 Hz, 24 bit, 2D, 2.0CH
Mode 2	01 11	↓ ↑ ↑ ↑		1080p/60 Hz, 24 bit, 3D, 2.0CH
Mode 3	10 11	↑ ↓ ↑ ↑		1080p/30 Hz, 1080i/60 Hz, 720p/60 Hz, 24 bit, 2D, 2.0CH
Mode 4	00 11	↓ ↓ ↑ ↑		1080p/30 Hz, 1080i/60 Hz, 720p/60 Hz, 24 bit, 2D, 7.1CH
Mode 5	11 01	↑ ↑ ↓ ↑		1080p/60 Hz, 36 bit, 2D, 2.0CH
Mode 6	010 1	↓ ↑ ↓ ↑		1080p/60 Hz, 36 bit, 2D, 7.1CH
Mode 7	100 1	↑ ↓ ↓ ↑		1080p/60 Hz, 24 bit, 2D, 2.0CH
Mode 8	000 1	↓ ↓ ↓ ↑		1080p/60 Hz, 24 bit, 2D, 7.1CH
Mode 9	11 10	↑ ↑ ↑ ↓		Copy Output 1
Mode 10	01 10	↓ ↑ ↑ ↓		Copy Output 2
Mode 11	101 0	↑ ↓ ↑ ↓		Copy Output 3
Mode 12	001 0	↓ ↓ ↑ ↓		Copy Output 4
Mode 13	11 00	↑ ↑ ↓ ↓		Compose Downscale



↑ =High ↓ =Low

Specifications:

Input Port	1x HDMI-A female
Output Ports	4x HDMI-A female
HDMI Version	2.0
HDCP Version	2.2
Output Resolution	480i/60 Hz, 576i/50 Hz,1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz 4:4:4
Video Bandwith	Up to 18 Gbps
CEC (Consumer Electronics Control)	Yes
DDC (Display Data Channel)	Yes
HDR (High-Dynamic Range)	Yes
EDID Management	Yes
LED Indicator	Yes
Chassis Material	Metal
3D Supporting	Yes
Power Consumption	5 W max.
Power Supply	5 V/1 A
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS-HD Master Audio™, Dolby TrueHD
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Dimensions	9.5 x 6.5 x 2.3 cm
Weight	211 g



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



HD0038



Made in China

Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.2 A max.
Output Power	5 V/1 A, 5 W
DC Plug	5.5 x 2.1 mm
Dimensions	51 x 35 x 59 mm
Cable Length	1.2 m
Weight	70 g



Package Contents:

- » 1x 4K HDMI Splitter
- » 1x Power Adapter
- » 1x User Manual

Package Information:

- » Packing Dimension: 190 x 145 x 60 mm
- » Packing Weight: 0.36 kg
- » Carton Dimension: 505 x 235 x 340 mm
- » Carton Q'ty: 15 pcs
- » Carton Weight: 5.6 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

