



Fiber Trunk Cable U-DQ(ZN)BH CPR Dca

Technical Features

LC/UPC to LC/UPC

8 cores OM4

Multimode 50/125 μ


LSZH, black, \varnothing 6 mm

LC MM simplex connector with clip, Erika violet


Flame retardant and halogen-free, Dca-s2, d0, a1

Compliant with EN 50575:2014+A1:2016

Technical Drawings

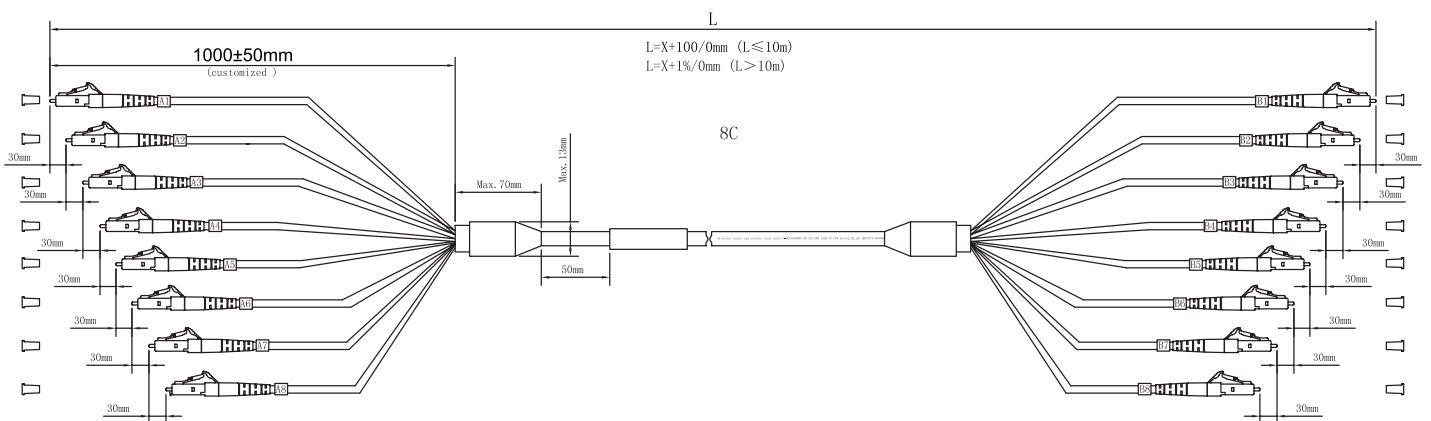

Pull ring with braided net on both ends:

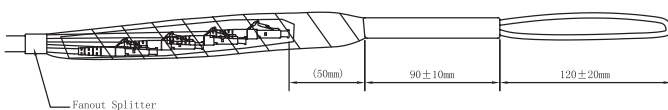


Test Grade Designation: Each to		Reference
Grade	IL/RL	Standard
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss (RL)	≥30dB	IEC 61300-3-6
Test Wavelength	850nm	Multi-mode
End face inspection	x400	

Length	LC/UPC-LC/UPC	EAN Code	Length	LC/UPC-LC/UPC	EAN Code
10 m	FT2U010	4052792067132	80 m	FT2U080	4052792067217
15 m	FT2U015	4052792067149	100 m	FT2U100	4052792067224
20 m	FT2U020	4052792067156	120 m	FT2U120	4052792067231
30 m	FT2U030	4052792067163	140 m	FT2U140	4052792067248
40 m	FT2U040	4052792067170	160 m	FT2U160	4052792067255
50 m	FT2U050	4052792067187	180 m	FT2U180	4052792067262
60 m	FT2U060	4052792067194	200 m	FT2U200	4052792067279
70 m	FT2U070	4052792067200			

Package Content

1 x Fiber Trunk Cable

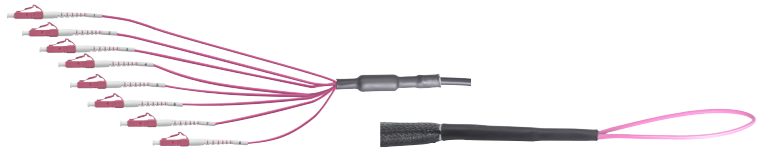

Packaging Information

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
FT2U010	305 x 305 x 35 mm	0,5 kg	335 x 335 x 220 mm	10 pcs	5,2 kg
FT2U015	305 x 305 x 35 mm	0,6 kg	335 x 335 x 220 mm	10 pcs	6,2 kg
FT2U020	305 x 305 x 40 mm	0,9 kg	335 x 335 x 220 mm	5 pcs	4,75 kg
FT2U030	305 x 305 x 45 mm	1,3 kg	335 x 335 x 220 mm	5 pcs	6,85 kg
FT2U040	305 x 305 x 60 mm	1,75 kg	335 x 335 x 220 mm	4 pcs	7,6 kg
FT2U050	305 x 305 x 85 mm	2,1 kg	335 x 335 x 220 mm	2 pcs	4,3 kg
FT2U060	305 x 305 x 85 mm	2,5 kg	335 x 335 x 220 mm	2 pcs	6 kg
FT2U070	305 x 305 x 85 mm	3 kg	335 x 335 x 220 mm	2 pcs	6,2 kg
FT2U080	305 x 305 x 85 mm	3,3 kg	335 x 335 x 220 mm	2 pcs	7,7 kg
FT2U100	320 x 320 x 200 mm	5,74 kg	335 x 335 x 220 mm	1 pcs	6,24 kg
FT2U120	320 x 320 x 200 mm	6,15 kg	335 x 335 x 220 mm	1 pcs	6,94 kg
FT2U140	320 x 320 x 200 mm	6,95 kg	335 x 335 x 220 mm	1 pcs	7,82 kg
FT2U160	400 x 400 x 200 mm	8,4 kg	415 x 415 x 220 mm	1 pcs	9,3 kg
FT2U180	400 x 400 x 200 mm	9,25 kg	415 x 415 x 220 mm	1 pcs	10,25 kg
FT2U200	400 x 400 x 200 mm	10,05 kg	415 x 415 x 220 mm	1 pcs	11,06 kg