LogiLink

Wireless Smart SOS Call Button

Art. No.: SH0116

Alert Button for Emergencies

Attach SOS button to elders' wheelchair or wrist with lanyard. When help is needed, they can press the button and it will notify you via free smartphone app using Wi-Fi connection.





App Remote Monitor

Smart SOS Call Button can be monitored through your existing Wi-Fi network via the free Smart Life or Megos Smart Home app.





Smart Life

Megos Smart Home

Download the free APP from the App Store or Google Play store.







Wi-Fi 2.4 GHz

()






)

Mountable


IP20

Rechargeable Battery

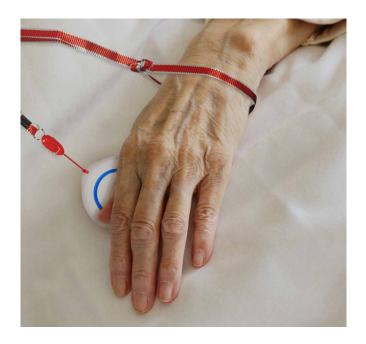

Emergency Button

Convenient for patient/elderly/handicapped/ sick who is seeking attention; also can be mounted under shop's counter as SOS button.

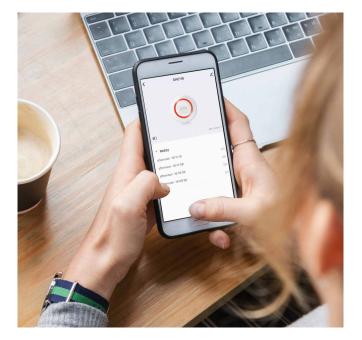

Remote Monitor from Anywhere

When button is pressed, it will send a push notification to your phone immediately, anywhere you are.



Security Automation

Connect with other LogiLink Smart products like Siren Alarm (SH0110) and IP Camera (SH0117) in automations to create a safer environment.

Specifications:

Wireless Standard	IEEE 802.11b/g/n
Wireless Frequency Range	2,412–2,484 MHz
Max. Transmission Power	50 mW
Max. Transmit Antenna Gain	3 dBi
Rated Voltage	DC 3.6 V
Power By	120 mAh rechargeable battery, charge through Micro USB port
Max. Power Consumption	0.2 W
Operation Distance (In Open Area)	120 m
Sensor Detection Distance	≤15 mm
Protection Class	IP20
Operating Temperature	-20–55°C
Operating Humidity	20–95% RH (non-condensing)
Color	White
Dimensions	6 x 5.7 x 1.9 cm
Weight	33 g
System Requirements	Android 5 or above / iOS 11 or above
	1. Hand-held

Package Contents:

- » 1x SOS Button
- » 1x Lanyard
- » 1x Pin
- » 1x Hook and Loop Fastener
- » 1x User Manual

Package Information:

- » Packing Dimension: 91 x 71 x 27 mm
- » Packing Weight: 0.065 kg
- » Carton Dimension: 435 x 300 x 500 mm
- » Carton Q'ty: 250 pcs
- » Carton Weight: 16.58 kg







