



App Remote Control

Wi-Fi LED Candle Light can be controlled through your existing Wi-Fi network via the free *Smart Life* or *Megos Smart Home* app.





Smart Life

Megos Smart Home

Download the free APP from the App Store or Google Play store.












4.2 W






Schedule Unique Lightings

Preset brightness and color modes to fit your activity or interior.

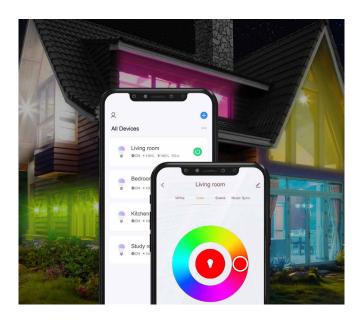

Remote Control from Anywhere

Control your lighting from anywhere with your phone via the app, even if you're not at home.

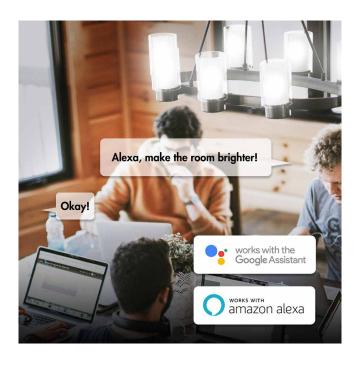

Works with Amazon Alexa and Google Home

Manage your lights through voice control to make your life effortless.

Specifications:

Wireless Standard	IEEE 802.11b/g/n
Wireless Technology	Wi-Fi
Wireless Frequency Range	2,412–2,472 MHz
Max. Transmission Power	49.204 mW
Max. Transmit Antenna Gain	2 dBi
Input Voltage	AC 230 V, 50 Hz
Energy Consumption per 1000 Hours	s 4 kWh
Max. Power Consumption	4.2 W
Color Rendering Index (Ra)	>80 Ra
Light Source	LED
Light Color	Warm to cool white & RGB
Color Temperature	RGB + 3000–6500K
Rated Luminous Flux	330 lm
Lamp Shape	Candle
Lamp Cap Type	E14
Beam Angle	160°
Wattage Equivalent	40 W
Dimmable	Yes
Number of Switching Cycles	50000 switching cycles
Rated Lifetime of Lamp	15000 hours
Operation Distance (In Open Area)	Up to 45 m
Operating Temperature	-20–45°C
Operating Humidity	20–85% RH (non-condensing)
Protection Class	IP20
Material	Plastic
Color	White
Dimensions	Ø3.7 x 11.2 cm
Weight	28 g
System Requirements	Android 5 or above / iOS 11 or above

Package Contents:

- » 1x Wi-Fi LED Candle Light
- » 1x User Manual

Package Information:

» Packing Dimension: 62 x 62 x 120 mm

» Packing Weight: kg » Carton Dimension: mm » Carton Q'ty: pcs

» Carton Weight: kg







◯ ENERG[†]

