

# **LogiLink**<sub>®</sub>

## **EV Charging Cable**

Type 2, 3-Phase, with Protection Bag

Art. No.: **EVC0120** 


EVC0121

EVC0122 EVC0123

LogiLink Type 2 standard charging cables connect your EV to the charging station, charging pole or wall-box, for easy charging at home or on the road. Suitable for plug-in hybrid (PHEV) and battery electric vehicles (BEV).

#### Features:

- » Suitable for electric vehicles (BEV) and plug-in hybrids (PHEV) from Tesla, Audi, Mercedes-Benz, BMW, VW, Porsche, Renault, Citroen, Peugeot, Ford, Opel, Chrysler, General Motors and others that have a CCS or Type 2 charging connection
- » Charging mode according to Mode 3 (IEC 61851) and connector according to IEC 62196-2
- » CE & TUV certified
- » IP65 with protection cap and overrun protections

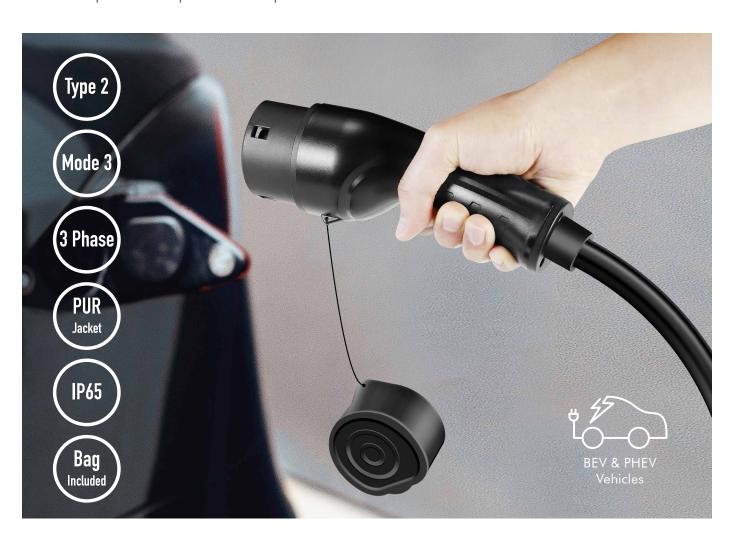

### **Specifications:**

Connector 1	IEC 62196-2 Type 2 charging plug, male			
Connector 2	IEC 62196-2 Type 2 charging plug, female			
Charging Mode	Mode 3			
Nominal Voltage	480 V AC			
Nominal Frequency	50 Hz/60 Hz			
Connection	3-Phase			
Protection Class	Mated: IP65, Unmated: IP54			
Cable Type	H07BZ5-F 5*6.0 mm <sup>2</sup> +1*0.5 mm <sup>2</sup> , PUR			
Operating Temperature	-30-50°C			
Housing Material	Plastic			
Color	Black			
Standard	IEC 62196-2, EN 50620:2017/A1:2019, IEC 61851, IEC 60332-1-2, IEC 60811-404, IEC 60754-2, IEC 60068-2-5			

Art-No.	<b>Charging Power</b>	Charging Current	Cable Length	EAN Code
EVC0120	22 kW	32 A	2.5 m	4052792070217
EVC0121	22 kW	32 A	5 m	4052792070224
EVC0122	22 kW	32 A	7.5 m	4052792070231
EVC0123	22 kW	32 A	10 m	4052792070248

- Package Contents:

  » 1 x EV Charging Cable

  » 1 x Protection Bag
- » 1 x User Manual



### **Package Information:**

Art-No.	<b>Packing Dimension</b>	<b>Packing Weight</b>	Carton Dimension	Carton Q'ty	Carton Weight
EVC0120	360 x 360 x 90 mm	2.37 kg	380 x 380 x 380 mm	4 pcs	11.2 kg
EVC0121	360 x 360 x 90 mm	3.7 kg	380 x 380 x 380 mm	4 pcs	15.6 kg
EVC0122	360 x 360 x 120 mm	4.9 kg	380 x 380 x 380 mm	3 pcs	15.5 kg
EVC0123	360 x 360 x 120 mm	6.02 kg	380 x 380 x 380 mm	3 pcs	18.9 kg

