

LogiLink®



4K HDMI™ Audio Extractor, 1x1 Port


4K/60 Hz, ARC, 2CH/5.1CH

Art. No.: HD0055


This upgraded audio extractor supports video resolution up to 4K@60 Hz and audio outputs through SPDIF or 3.5 mm stereo. It also supports ARC function, easily connect it to an ARC compatible TV. Allowing you to output audio signal to external audio systems.

Features:

- » Converts digital HDMI signals to analog and digital Audio (HDMI, SPDIF & 3.5 mm)
- » ARC function offers two-way communication between devices over a single HDMI connection
- » Supports 2CH/5.1CH/PASS audio switching
- » Supports UHD 4K@60 Hz (YUV 4:4:4) and Full 3D
- » Bandwidth up to 18 Gbps (6 Gbps at 600 MHz per channel)
- » Supports HDCP 2.2, HDR, DDC and CEC
- » Supports 36 bit Deep Color (12 bit per channel)
- » Supports HDMI output audio format: DTS-HD Master Audio™/Dolby TrueHD
- » Plug and play, no drivers needed

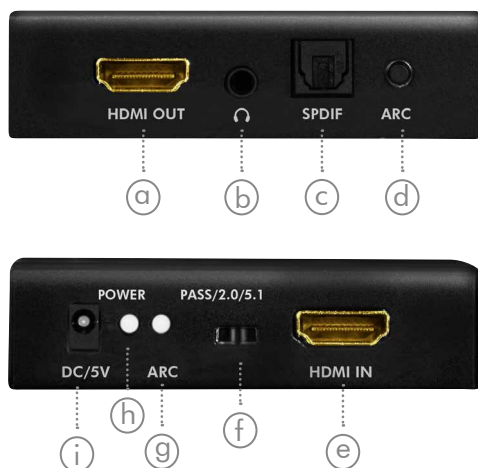

- (a) HDMI output port
- (b) 3.5 mm stereo audio output
- (c) S/PDIF audio output port
- (d) ARC function on/off switch button
- (e) HDMI input port
- (f) PASS/2CH/5.1CH switch button for selecting the audio format
- (g) ARC status LED (blue)
- (h) Power LED (Blue)
- (i) DC 5 V input

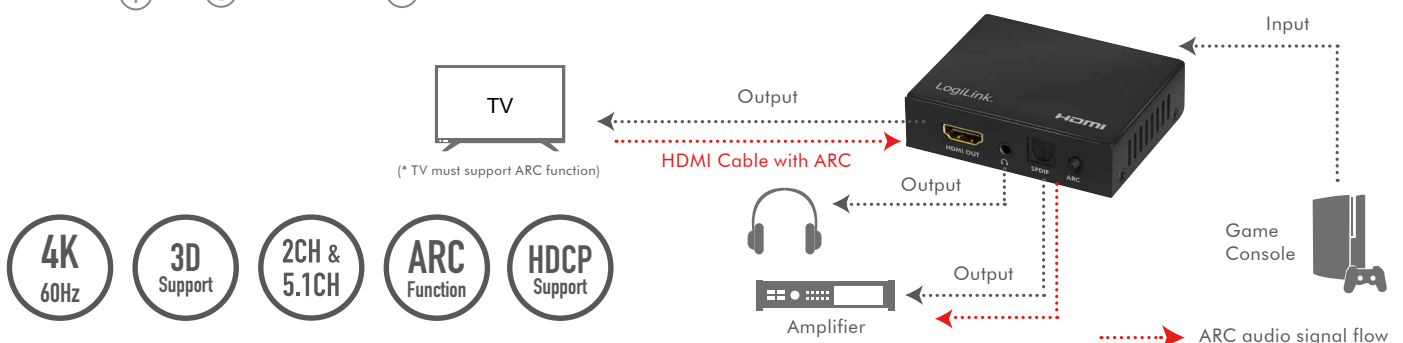

*The specifications and pictures are subject to change without prior notice.

*All trade names referenced are the registered trademarks of their respective owners.

Specifications:

Input Ports	1x HDMI-A female, 1x DC power jack
Output Ports	2x HDMI-A female, 1x SPDIF, 1x 3.5 mm jack (TRS)
HDMI Version	2.0
HDCP Version	2.2
HDMI ARC	Yes
HDMI CEC	Yes
HDMI HDR	Yes
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz
Video Bandwidth	Up to 18 Gbps
3D Supporting	Yes
Input and output DDC signal	Yes
SPDIF Interface	Yes
Chassis Material	Metal
LED Indicator	Yes
Power Consumption	5 W max.
Power Supply	DC 5 V/1 A (5 W)
Uncompressed Audio	LPCM 7.1
Compressed Audio	HDMI: DTS-HD Master Audio™, Dolby TrueHD SPDIF: DTS/Dolby Digital
Operating Temperature	0–70°C
Operating Humidity	10 –85% RH (no condensation)
Dimensions	7.8 x 6 x 2 cm
Weight	123 g

Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.2 A max.
Output Power	5 V/1 A, 5 W
DC Plug	3.5 x 1.35 mm
Dimensions	51 x 35 x 59 mm
Cable Length	1.2 m
Weight	70 g



Package Contents:

- » 1x 4K HDMI Audio Extractor
- » 1x Power Adapter
- » 1x User Manual

Package Information:

- » Packing Dimension: 167 x 107 x 50 mm
- » Packing Weight: 0.27 kg
- » Carton Dimension: 575 x 255 x 345 mm
- » Carton Q'ty: 40 pcs
- » Carton Weight: 11.5 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

